

### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Rated flow: 60 l/min


Cartridge Valve:

Refer to CB11A-X-Y-Z

\* Reference our Cartridge Valves Catalog.

Weight: 1.6 kg(include valve)

\* If you need the special specification. Please contact us.

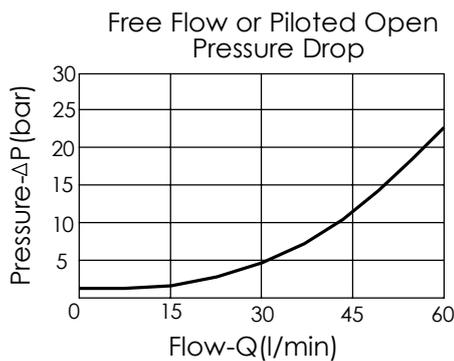

### X SELECTION FOR COUNTERBALANCE VALVES

<b>11A3</b>	CAVITY ONLY(WITHOUT VALVE)
<b>CB3H</b>	CB11A33HL ( 3:1 , 280bar)
<b>CB4J</b>	CB11A34JL ( 4.5:1 , 350bar)
<b>CB0J</b>	CB11A30JL ( 10:1 , 350bar)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)

Y	PORT SIZE	
	PORTS	PORT
	<b>A.B</b>	<b>S</b>
<b>G04</b>	G 1/2"	G 1/4"

### Z BODY MATERIAL

**A** HIGH-STRENGTH ALUMINUM